


UNIQUE SOUND Co., Ltd

MODEL No. : US-4028A


- . Transducer Type : Micro Dynamic Speaker

1. Electro-Acoustical SPEC

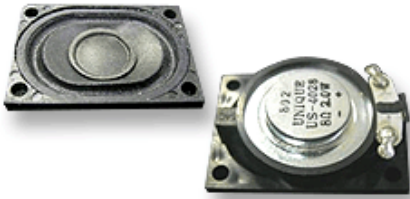

Outer Dimension	40mm X 28.5 mm X 11.3 T
Net Weight	12.0 ± 1.0[g]
Impedance	8 Ω ± 15 % with 1[V] @ 1[kHz]
Sound Pressure Level	82dB ± 3dB (1W/1m) 800Hz. 1.0k, 1,2k, 1.5kHz Average
Rated / Max Input Power	1.0 W / 2.0 W
Specific Range	500 Hz ~ 20 kHz
Buzz, Rattle	Should not be audible at 2.83V sine wave from 500 Hz to 20 kHz

2. Mechanical Dimension

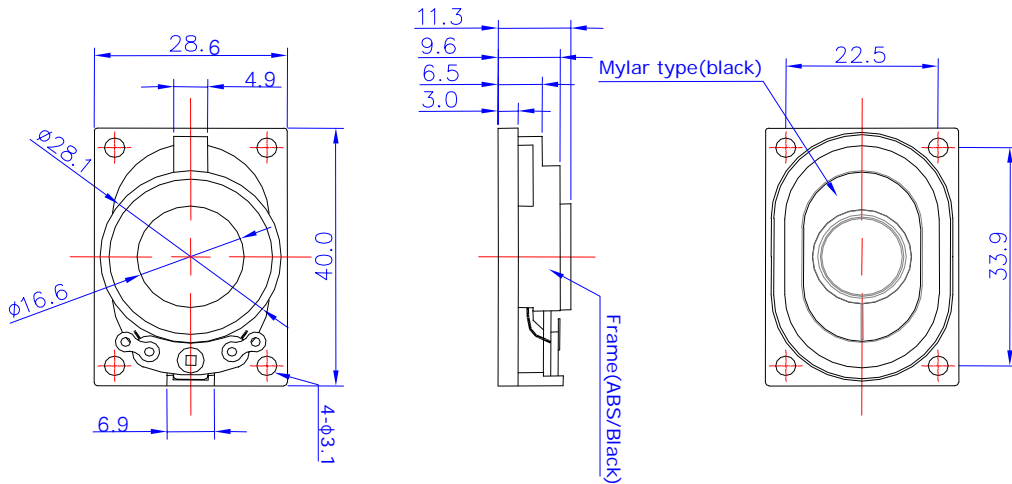

3. Frequency Response Curve

*Measuring Condition
(Sine wave at free baffle, 1.0W, at 1.0m)

